

Punte a gradino ad eliche indipendenti, cil.


Articolo nr. 85010



P	M	K	N	S	H
●	○	●	○		



Assott. del nocc. $\geq \varnothing 6,000$ • spoglia sul cono tagliente • per fori passanti a DIN EN 20273, serie fine • per svasature per teste di viti 90°
 • l'avanz. si basa sul diametro inferiore • Vc si basa sul diametro maggiore

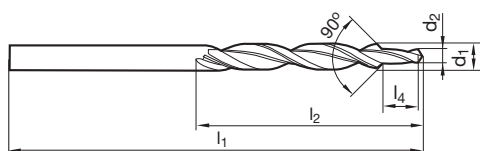

d1 h8 mm	d2 h9 mm	l1 mm	l2 mm	l4 mm	per filettatura
6,000	3,200	93,000	57,000	9,000	M 3
8,000	4,300	117,000	75,000	11,000	M 4
10,000	5,300	133,000	87,000	13,000	M 5
11,500	6,400	142,000	94,000	15,000	M 6
15,000	8,400	169,000	114,000	19,000	M 8
19,000	10,500	198,000	135,000	23,000	M 10