


**596 - 598**
**chiavi dinamometriche a lettura diretta adatte a serraggi destrorsi e sinistrorsi  
 precisione di serraggio  $\pm 4\%$** 
**UNI EN ISO 6789**

Il raggiungimento della coppia prefissata  
 viene segnalato da una luce  
 e da un suono intermittente



	art.	Nm	Kgfm	lbf.ft	■	A mm	L mm	 kg
<b>005960010</b>	596/40SL	80÷400	8÷40	60÷300	3/4	111	710	3,2
<b>005960020</b>	596/80SL	160÷800	16÷80	120÷600	3/4	115	1025	4,85
<b>005980022</b>	598/200SL	400÷2000	40÷200	300÷1500	1"	135	1930	16,70

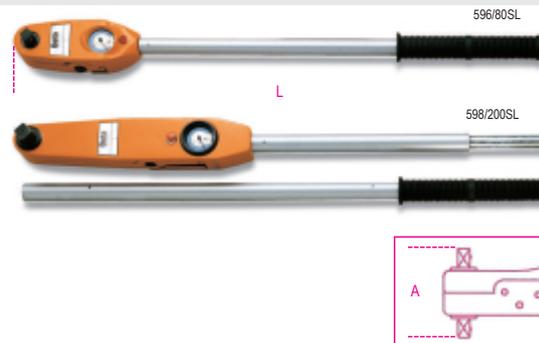